# **Recessed Mounted 4C Horizontal Mailboxes**

continued on pages 18 - 19


#### **RECESSED MOUNTED 4C HORIZONTAL MAILBOXES** FRONT LOADING USPS - PRIMITE

Made of heavy duty aluminum and stainless steel hardware, Salsbury 3700 series recessed mounted 4C horizontal mailboxes and parcel lockers are U.S.P.S. approved and are available with standard MB1 mailbox doors (12-3/4" W x 3-1/4" H). Larger MB2, MB3 and MB4 mailbox doors are available for custom units - see door sizes on page 31. All pre-numbered mailbox doors include a heavy duty cam lock with a dust/rain shield and three (3) keys. Recessed mounted 4C horizontal mailbox units include factory installed 1" W x 1/4" D trim and are available in configurations that are one door wide (single column) and two (2) doors wide (double column). The Salsbury maximum height units (3716D-15) have three (3) fully integrated parcel lockers (2 PL4.5 and 1PL5) and fifteen (15) standard MB1 mailbox doors and meet the U.S.P.S. 4C requirement of one parcel locker for every five (5) tenant compartments. Fully integrated and stand-alone parcel lockers are available in heights ranging from the equivalent of three (3) standard MB1 mailbox doors (PL3 - 10-1/4" high) to six (6) standard MB1 mailbox doors (PL6 - 20-3/4" high). Each unit includes a compartment for outgoing mail collection and is labeled "Outgoing Mail". The outgoing mail compartment includes a weather protection flap and a 11-3/4" W x 3/4" H mail slot. Designed for indoor or outdoor use, recessed mounted 4C horizontal mailboxes feature a durable powder coated finish available in four (4) contemporary colors.



Note: Salsbury 3700 series recessed mounted 4C horizontal mailboxes and parcel lockers are U.S.P.S. approved and meet the specifications of USPS-STD-4C. These units are required for new construction and major renovations.

#### STANDARD FEATURES



Access door for U.S.P.S. provided master arrow lock or master commercial lock

Front view of 3716D-15 Front Loading Recessed Mounted Double Column Unit displayed

	7 8 9 10 11 11 12	<ul> <li>16</li> <li>17</li> <li>18</li> <li>19</li> <li>20</li> <li>21</li> </ul>	22 23 24 25 26 27	31 32 33 34 35 36	37 38 39 40 41 41 42	0         46           0         47           0         48           0         49           0         50           0         51	0     52       0     53       0     54       0     55       0     56       0     57
• • 1P • •	• 13 • 13 • 14 • 15	୍ ୫ 4P କ୍	28 29 30	. ₩ 7P • •	43 44 45	ି 👻 10P ତ	US MAK US MAK US 58 US 59 US 60
* 2P	9 👾 3P	● ● 5P	9 6P	9 10 8P	9P 	ି ଓ 11P କ	୍ 🥶 12P ଜ
						ALL ALUMIN CONSTRUCT	UMO
					ght recessed mount Il custom engraved p		

mai boxes com 1 900 MATI DOV

16

Phone 1.800.MAILBOX



## MAXIMUM HEIGHT UNITS - 57-1/8" H

## 11 DOOR HIGH UNITS - 41-3/8" H



Double Column - Front Loading



3716D-15 Double Column - Front Loading



**3711D-20** Double Column - Front Loading



**3711D-10** Double Column - Front Loading

#### RECESSED MOUNTED 4C HORIZONTAL MAILBOXES - FRONT LOADING - U.S.P.S. APPROVED

#### UNIT SIZE (includes tri MODEL DESCRIPTION MAXIMUM HEIGHT UNITS - 57-1/8" H (maximum allowable height) 3716D-20<sup>1,2</sup> 170 lbs. 20 MB1 Doors and 2 Parcel Lockers (PL4.5's) 31-1/8" W x 57-1/8" H x 16-1/2" D 3716D-15<sup>1,2</sup> 15 MB1 Doors and 3 Parcel Lockers (PL4.5's, PL5) 31-1/8" W x 57-1/8" H x 16-1/2" D 160 lbs. 3716D-10<sup>1,2</sup> 10 MB1 Doors and 4 Parcel Lockers (PL4.5's, PL5's) 31-1/8" W x 57-1/8" H x 16-1/2" D 150 lbs. 3716D-6P<sup>1,2</sup> 6 Parcel Lockers (PL4.5's, PL5's, PL6's) 31-1/8" W x 57-1/8" H x 16-1/2" D 145 lbs. 3716S-09<sup>1,2</sup> 85 lbs. 9 MB1 Doors and 1 Parcel Locker (PL4.5) 17" W x 57-1/8" H x 16-1/2" D 3716S-06<sup>1,2</sup> 85 lbs. 6 MB1 Doors and 2 Parcel Lockers (PL3, PL4.5) 17" W x 57-1/8" H x 16-1/2" D 3716S-3P1,2 3 Parcel Lockers (PL4.5, PL5, PL6) 17" W x 57-1/8" H x 16-1/2" D 80 lbs.

 : P45
 : P45
 : P45
 : P45


 3716D-20
 3716D-15
 3716D-10

 : P45
 : P45
 : P45


 : P45
 : P45
 : P45

MAXIMUM HEIGHT UNITS - 57-1/8" H

DESCRIPTION UNIT SIZE (includes to 11 DOOR HIGH UNITS - 41-3/8" H (equivalent to 11 standard mailbox doors (MB1) high) 3711D-20<sup>1,2</sup> 20 MB1 Doors - no Parcel Lockers 31-1/8" W x 41-3/8" H x 16-1/2" D 145 lbs. 3711D-15<sup>1,2</sup> 15 MB1 Doors and 1 Parcel Locker (PL5) 31-1/8" W x 41-3/8" H x 16-1/2" D 135 lbs 3711D-10<sup>1,2</sup> 10 MB1 Doors and 2 Parcel Lockers (PL5's) 31-1/8" W x 41-3/8" H x 16-1/2" D 135 lbs 3711D-4P<sup>1,2</sup> 4 Parcel Lockers (PL5's, PL6's) 31-1/8" W x 41-3/8" H x 16-1/2" D 130 lbs. 3711S-09<sup>1,2</sup> 9 MB1 Doors - no Parcel Lockers 17" W x 41-3/8" H x 16-1/2" D 75 lbs. 3711S-04<sup>1,2</sup> 4 MB1 Doors and 1 Parcel Locker (PL5) 17" W x 41-3/8" H x 16-1/2" D 75 lbs 3711S-2P<sup>1,2</sup> 2 Parcel Lockers (PL5, PL6) 17" W x 41-3/8" H x 16-1/2" D 65 lbs



37165-09



37165-06

# TS • CELL PHONE LOCKERS

## Current Pricing and Volume Discounts Available at Mailboxes.com!



<sup>2</sup> Specify - U.S.P.S. access or private access (order #3775 master commercial lock for private access on FL units and PL's)

4C horizontal mailboxes available on pages 18-19 and online

SALSBURY

RESIDENTIAL MAILE

PL5 ; PL5

PL6 ; PL6

PL4.5 ; PL4.

PL5

PL6

; PL4.5

3716S-3F

3716D-6P

COMMERCIAL MAILBOXES



Phone 1.800.MAILBOX

# Recessed Mounted 4C Horizontal Mailboxes

for custom 4C mailbox units and options – see pages 28-31

# **ARCHITECTURAL RESOURCES ONLINE**

**ALL ALUMINUM** 

CONSTRUCTION

visit: www.mailboxes.com/Architectural-Resources


- Product Information
- 3D Revit / BIM Models
- Augmented Reality (AR) Models
- Detailed Specifications
- Technical Drawings
- Installation Instructions
- AutoCAD Drawings
- Color Chart
- ADA Compliant Units Available - see page 19 or visit: www.mailboxes.com/ADA-4C-Mailboxes





Note: Salsbury 3700 series recessed mounted 4C horizontal mailboxes and parcel lockers are U.S.P. S. approved and meet the specifications of USPS-STD-4C. These units are required for new construction and major renovations.

# **4C MAILBOX CONFIGURATOR**



#### Access our 4C Configurator at: www.mailboxes.com/Mailbox-Configurator

Our 4C mailbox configurator will assist in determining the ideal combination of mailboxes and parcel lockers based on your specific requirements. This robust tool also allows you to customize 4C mailbox units and add numbering sequences to drawings. In addition to clear and easy to read elevation line drawings with dimensions, our online mailbox configurator will also provide you with PDF, Word, Excel and AutoCAD drawing files to download for your project. Purchasing products and requesting a quote online is simple and convenient.

# **4C CONNECTOR KIT**

Made of heavy duty aluminum, 4C horizontal mailbox connector kits easily connect multiple recessed mounted mailbox units providing easy installation. Each standard and custom recessed mounted 4C horizontal mailbox unit includes one mailbox connector kit (hardware included).

Note: For installations accessed by the U.S. Postal Service, the tenant locks in the top row of mailboxes must be no more than 67" above the finished floor and the bottom shelf of the lowest row of mailboxes must be no less than 28" above the finished floor. The U.S.P. S. master arrow lock must be a minimum of 36" and a maximum of 48" above the finished floor. The bottom shelf of parcel lockers must be at least 15" above the finished floor.

SALSBURY



18

## 10 DOOR HIGH UNITS\* - 37-7/8" H

## 6 DOOR HIGH UNITS\* - 23-7/8" H





3710D-10 Double Column - Front Loading



6 1 6 2 8 6 3 6 4 JS BL 8 5 6 9 6 6 10





3706S-04 Single Column - Front Loading




 $^{\star}$ All units meet ADA reach requirements when installed with the tenant locks in the top row of mailboxes no more than 48" above the finished floor and the bottom shelf of the lowest row of mailboxes no less than 28" above the finished floor.

#### RECESSED MOUNTED 4C HORIZONTAL MAILBOXES - FRONT LOADING - U.S.P.S. APPROVED


MODEL	DESCRIPTION	UNIT SIZE (includes trim)	WEIGHT
10 DOOR HIG	H UNITS - 37-7/8" H (equivalent to 10 st	andard mailbox doors (MB1) high)	Ġ.
3710D-10 <sup>1,2</sup>	10 MB1 Doors and 2 Parcel Lockers (PL4, PL4.5)	31-1/8" W x 37-7/8" H x 16-1/2" D	130 lbs.
3710D-09 <sup>1,2</sup>	9 MB1 Doors and 2 Parcel Lockers (PL4.5, PL5)	31-1/8" W x 37-7/8" H x 16-1/2" D	130 lbs.
3710D-06 <sup>1,2</sup>	6 MB1 Doors and 2 Parcel Lockers (PL6's)	31-1/8" W x 37-7/8" H x 16-1/2" D	125 lbs.
3710D-4P <sup>1,2</sup>	4 Parcel Lockers (PL5's)	31-1/8" W x 37-7/8" H x 16-1/2" D	120 lbs.
3710S-04 <sup>1,2</sup>	4 MB1 Doors and 1 Parcel Locker (PL4.5)	17" W x 37-7/8" H x 16-1/2" D	75 lbs.
3710S-03 <sup>1,2</sup>	3 MB1 Doors and 1 Parcel Locker (PL5)	17" W x 37-7/8" H x 16-1/2" D	70 lbs.
3710S-2P <sup>1,2</sup>	2 Parcel Lockers (PL5's)	17" W x 37-7/8" H x 16-1/2" D	65 lbs.

#### 10 DOOR HIGH UNITS - 37-7/8" H



MODEL	DESCRIPTION	UNIT SIZE (includes trim)	WEIGHT
6 DOOR HIGH	I UNITS - 23-7/8" H (equivalent to 6	standard mailbox doors (MB1) high)	ক
3706D-10 <sup>1,2</sup>	10 MB1 Doors - no Parcel Lockers	31-1/8"W x 23-7/8"H x 16-1/2"D	90 lbs.
3706D-09 <sup>1,2</sup>	9 MB1 Doors - no Parcel Lockers	31-1/8" W x 23-7/8" H x 16-1/2" D	90 lbs.
3706D-05 <sup>1,2</sup>	5 MB1 Doors and 1 Parcel Locker (PL5)	31-1/8" W x 23-7/8" H x 16-1/2" D	85 lbs.
3706D-2P <sup>1,2</sup>	2 Parcel Lockers (PL6's)	31-1/8" W x 23-7/8" H x 16-1/2" D	80 lbs.
3706S-04 <sup>1,2</sup>	4 MB1 Doors - no Parcel Lockers	17" W x 23-7/8" H x 16-1/2" D	50 lbs.
3706S-03 <sup>1,2</sup>	3 MB1 Doors - no Parcel Lockers	17" W x 23-7/8" H x 16-1/2" D	50 lbs.
3706S-1P <sup>1,2</sup>	1 Parcel Locker (PL6)	17"W x 23-7/8"H x 16-1/2"D	45 lbs.





#### Current Pricing and Volume Discounts Available at Mailboxes.com!

<sup>1</sup> Specify					OUTGOING MAIL COMPARTMENT
	aluminum	bronze	sandstone	black	Note: Recessed mounted 4C horizontal mailboxes
					include a compartment for outgoing mail collection that is labeled "Outgoing Mail".

<sup>2</sup> Specify - U.S.P.S. access or private access (order #3775 master commercial lock for private access on FL units and PL's)

For custom 4C mailbox units, specifications & options - see pages 28-31

mai boxes com 1-800-MAIL BOX

Phone 1.800.MAILBOX



# 4C Horizontal Mailbox Specifications & Options

see 4C horizontal mailbox units on pages 16 - 29

- Manufactured by Salsbury Industries to USPS-STD-4C Specifications
- 4C Recessed Mounted Mailboxes are Required for New Construction and Major Renovations
- For Indoor or Outdoor Use
- Fully Integrated or Stand-Alone Parcel Lockers
- ADA Compliant Units Available - see pages 19, 23 and 27 or visit: www.mailboxes.com/ADA-4C-Mailboxes

# Current Pricing and Volume Discounts Available at Mailboxes.com!

ALL ALUMINUM



Note: Salsbury custom recessed mounted 4C horizontal mailboxes and parcel lockers are U.S.P.S. approved and meet the specifications of USPS-STD-4C. 4C mailboxes are required for new construction and major renovations. Salsbury custom surface mounted and free-standing units include a U.S.P.S. approved 4C horizontal mailbox, matching enclosure and master commercial locks for private access.

## 4C MAILBOX CONFIGURATOR



#### Access our 4C Configurator at: www.mailboxes.com/Mailbox-Configurator

Our 4C mailbox configurator will assist in determining the ideal combination of mailboxes and parcel lockers based on your specific requirements. This robust tool also allows you to customize 4C mailbox units and add numbering sequences to drawings. In addition to clear and easy to read elevation line drawings with dimensions, our online mailbox configurator will also provide you with PDF, Word, Excel and AutoCAD drawing files to download for your project. Purchasing products and requesting a quote online is simple and convenient.



#### **DESIGN ASSISTANCE**

Our design engineers are available to architects, specification writers and individuals involved in the design of mail distribution facilities, apartment complexes and commercial buildings. Visit the informative Architect Resources section of our website at: www.mailboxes.com/Architectural-Resources to download specifications, technical drawings, AutoCAD, BIM/ Revit models and Augmented Reality (AR) models. You can also submit required layout and options for a price quotation.

Custom recessed mounted 4C horizontal mailboxes in aluminum finish with optional custom engraved doors - black filled (#3774) displayed

mai boxes.com

30

Phone 1.800.MAILBOX



COMMERCIAL MAILBOXES

S IDENTIAL MAILBOXES 20 POS


J

Front loading units include one or two (2) master door(s) that swing(s) on continuous integral hinges. The outgoing mail compartment includes the access door and cannot be used for mail distribution. The rear of the unit incorporates a solid rear cover. Note: U.S.P.S. standard 4C requires a minimum of one parcel locker for every five (5) tenant compartments. Parcel lockers are not required for installation sites with less than five (5) tenant compartments.



Front view of Front Loading Recessed Mounted Double Column Unit displayed


master arrow lock or master commercial lock



Heavy duty cam locks for added security

Front view of Front Loading Recessed Mounted Double Column Unit with Doors Open displayed

#### 4C HORIZONTAL MAILBOX SPECIFICATIONS & OPTIONS FOR RECESSED MOUNTED, SURFACE MOUNTED AND FREE-STANDING MAILBOX UNITS

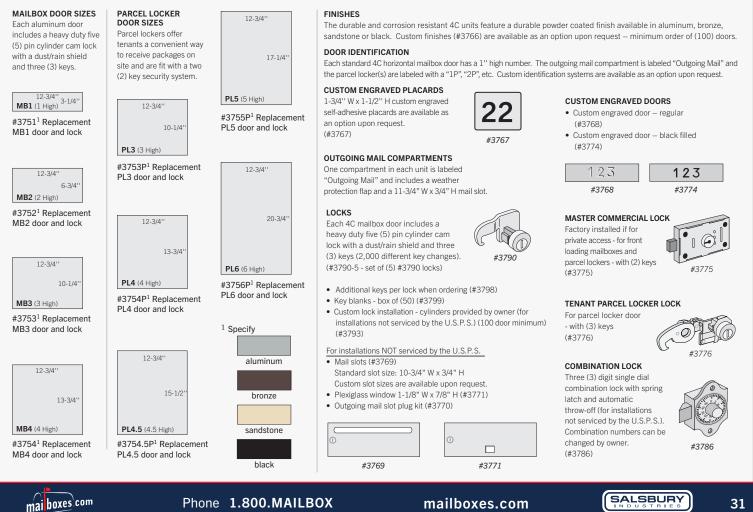

Phone 1.800.MAILBOX

1 900 MATL PO

