



MAXIMUM HEIGHT UNITS - STANDARD HEIGHT

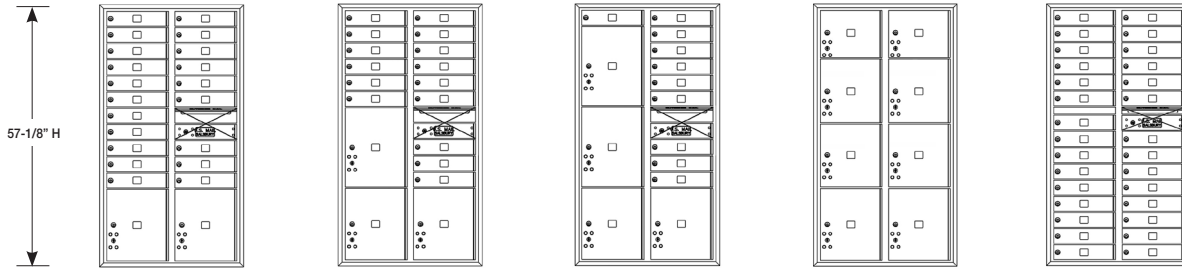


3716D-20 (20 MB1, 2 PL4.5, OM2) **3716D-15** (15 MB1, 2 PL4.5, 1 PL5, OM2) **3716D-10** (10 MB1, 2 PL4.5, 2 PL5, OM2) **3716D-8P** (2 PL3, 4 PL4, 2 PL4.5) **3716D-29¹** (29 MB1, OM1.5)

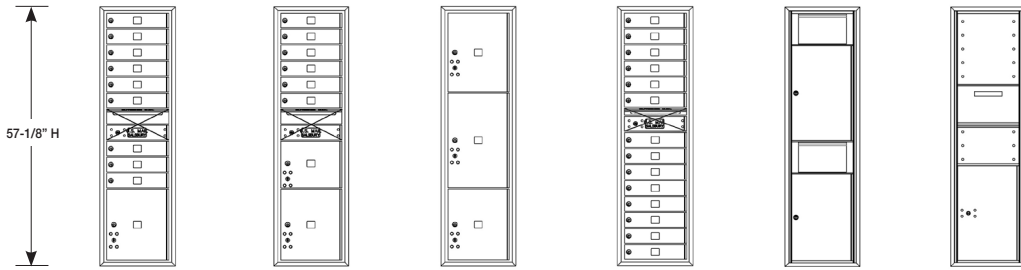

3716S-09 (9 MB1, 1 PL4.5, OM2) **3716S-06** (6 MB1, 1 PL3, 1 PL4.5, OM2) **3716S-3P** (1 PL4.5, 1 PL5, 1 PL6) **3716S-14¹** (14 MB1, OM1.5) **3716S-2B¹** (2 Receptacle Bins) **3716S-1C¹** (1 Collection Box)

11 DOOR HIGH UNITS - STANDARD HEIGHT

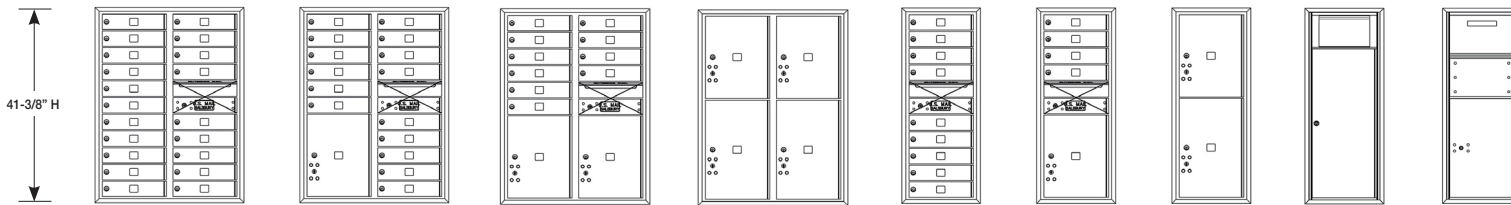

3711D-20 (20 MB1, OM2) **3711D-15** (15 MB1, 1 PL5, OM2) **3711D-10** (10 MB1, 2 PL5, OM2) **3711D-4P** (2 PL5, 2 PL6) **3711S-09** (9 MB1, OM2) **3711S-04** (4 MB1, 1 PL5, OM2) **3711S-2P** (1 PL5, 1 PL6) **3711S-1B¹** (1 Receptacle Bin) **3711S-1C¹** (1 Collection Box)

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 17" W

MAILBOX DOOR SIZES:
MB1 - 12-3/4" W x 3-1/4" H
MB2 - 12-3/4" W x 6-3/4" H
MB3 - 12-3/4" W x 10-1/4" H
MB4 - 12-3/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:
PL3 - 12-3/4" W x 10-1/4" H
PL4 - 12-3/4" W x 13-3/4" H
PL4.5 - 12-3/4" W x 15-1/2" H
PL5 - 12-3/4" W x 17-1/4" H
PL6 - 12-3/4" W x 20-3/4" H



OUTGOING MAIL COMPARTMENT (OM2)
Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.



OUTGOING MAIL COMPARTMENT (OM3)
Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



OUTGOING MAIL COMPARTMENT (OM1.5)
Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.




CARRIER ACCESS (CA) DOOR
Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.


Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

¹These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

10 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

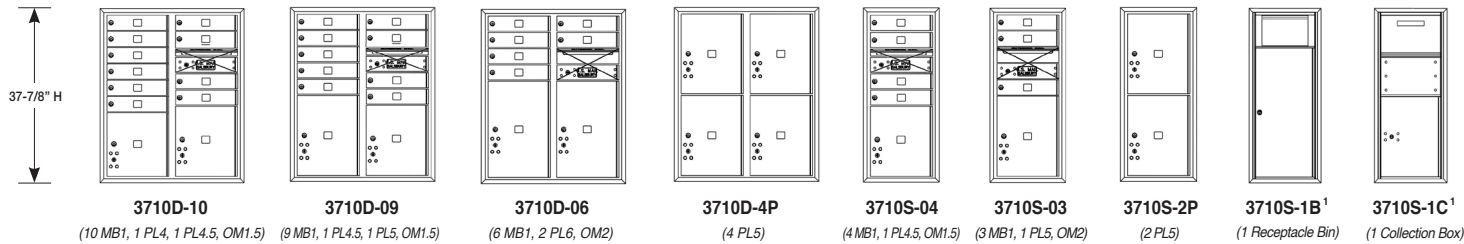

6 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

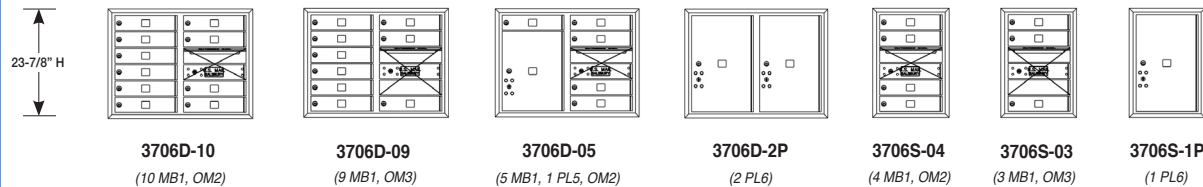

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 17" W

MAILBOX DOOR SIZES:
MB1 - 12-3/4" W x 3-1/4" H
MB2 - 12-3/4" W x 6-3/4" H
MB3 - 12-3/4" W x 10-1/4" H
MB4 - 12-3/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:
PL3 - 12-3/4" W x 10-1/4" H
PL4 - 12-3/4" W x 13-3/4" H
PL4.5 - 12-3/4" W x 15-1/2" H
PL5 - 12-3/4" W x 17-1/4" H
PL6 - 12-3/4" W x 20-3/4" H

OUTGOING MAIL COMPARTMENT (OM2)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

OUTGOING MAIL COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

¹These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.