

## MAXIMUM HEIGHT UNITS - STANDARD HEIGHT

72-1/8" H

72-1/8" H

**3916D-20**  
(20 MB1, 2 PL4.5, OM2)

**3916D-15**  
(15 MB1, 2 PL4.5, 1 PL5, OM2)

**3916D-10**  
(10 MB1, 2 PL4.5, 2 PL5, OM2)

**3916D-8P**  
(2 PL3, 4 PL4, 2 PL4.5)

**3916D-29<sup>1</sup>**  
(29 MB1, OM1.5)

**3916S-09**  
(9 MB1, 1 PL4.5, OM2)

**3916S-06**  
(6 MB1, 1 PL3, 1 PL4.5, OM2)

**3916S-3P**  
(1 PL4.5, 1 PL5, 1 PL6)

**3916S-14<sup>1</sup>**  
(14 MB1, OM1.5)

**3916S-2B<sup>1</sup>**  
(2 Receptacle Bins)

**3916S-1C<sup>1</sup>**  
(1 Collection Box)

**DOUBLE COLUMN WIDTH:** 31-3/4" W  
**SINGLE COLUMN WIDTH:** 17-3/4" W

**MAILBOX DOOR SIZES:**  
MB1 - 12-3/4" W x 3-1/4" H  
MB2 - 12-3/4" W x 6-3/4" H  
MB3 - 12-3/4" W x 10-1/4" H  
MB4 - 12-3/4" W x 13-3/4" H

**PARCEL LOCKER DOOR SIZES:**  
PL3<sup>2</sup> - 12-3/4" W x 10-1/4" H  
PL4<sup>2</sup> - 12-3/4" W x 13-3/4" H  
PL4.5 - 12-3/4" W x 15-1/2" H  
PL5 - 12-3/4" W x 17-1/4" H  
PL6 - 12-3/4" W x 20-3/4" H

**OUTGOING MAIL COMPARTMENT (OM2)**

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

**OUTGOING MAIL COMPARTMENT (OM3)**

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

**OUTGOING MAIL COMPARTMENT (OM1.5)**

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

**CARRIER ACCESS (CA) DOOR**

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Free-Standing 4C Horizontal Mailboxes include a U.S.P.S. approved 4C horizontal mailbox unit and a matching enclosure. For delivery of U.S. mail, contact your local postmaster for approval.

<sup>1</sup>These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

## 11 DOOR HIGH UNITS - STANDARD HEIGHT

69-3/8" H

69-3/8" H

**3911D-20**  
(20 MB1, OM2)

**3911D-15**  
(15 MB1, 1 PL5, OM2)

**3911D-10**  
(10 MB1, 2 PL5, OM2)

**3911D-4P**  
(2 PL5, 2 PL6)

**3911S-09**  
(9 MB1, OM2)

**3911S-04**  
(4 MB1, 1 PL5, OM2)

**3911S-2P**  
(1 PL5, 1 PL6)


**3911S-1B<sup>1</sup>**  
(1 Receptacle Bin)

**3911S-1C<sup>1</sup>**  
(1 Collection Box)


# Standard Free-Standing 4C Horizontal Mailbox Configurations

(Revised 1/1/2021)

## 10 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

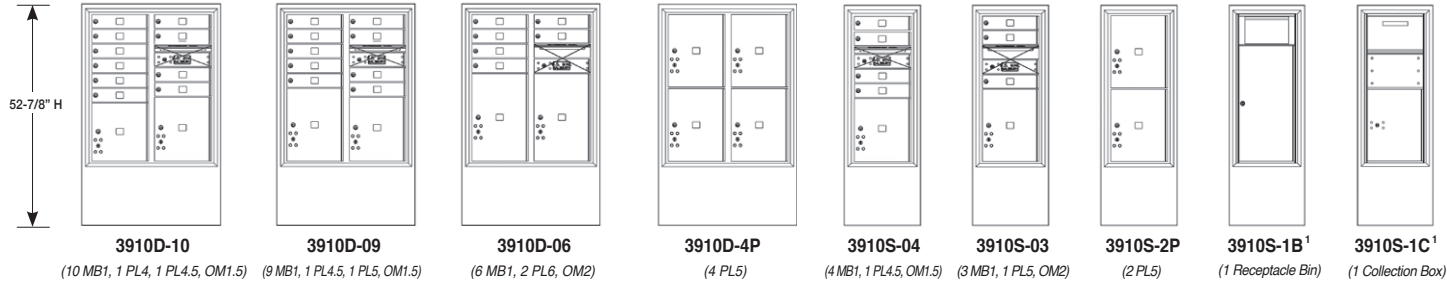

## 6 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

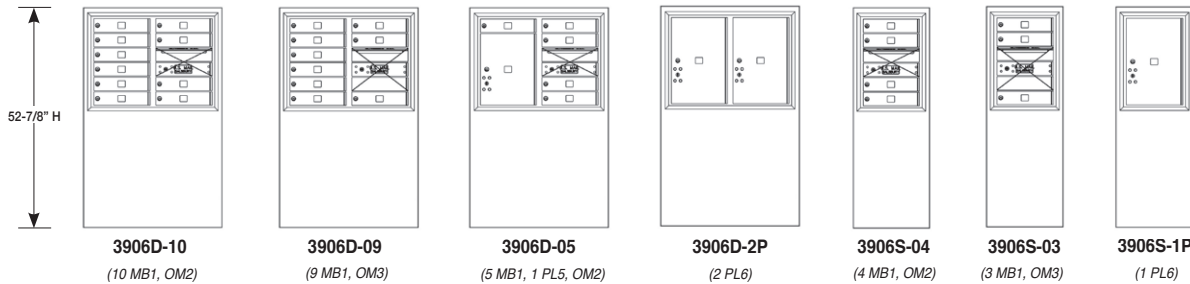

**DOUBLE COLUMN WIDTH:** 31-3/4" W  
**SINGLE COLUMN WIDTH:** 17-3/4" W

**MAILBOX DOOR SIZES:**  
MB1 - 12-3/4" W x 3-1/4" H  
MB2 - 12-3/4" W x 6-3/4" H  
MB3 - 12-3/4" W x 10-1/4" H  
MB4 - 12-3/4" W x 13-3/4" H

**PARCEL LOCKER DOOR SIZES:**  
PL3<sup>2</sup> - 12-3/4" W x 10-1/4" H  
PL4<sup>2</sup> - 12-3/4" W x 13-3/4" H  
PL4.5 - 12-3/4" W x 15-1/2" H  
PL5 - 12-3/4" W x 17-1/4" H  
PL6 - 12-3/4" W x 20-3/4" H

 **OUTGOING MAIL COMPARTMENT (OM2)**

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

 **OUTGOING MAIL COMPARTMENT (OM3)**

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

 **OUTGOING MAIL COMPARTMENT (OM1.5)**

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

 **CARRIER ACCESS (CA) DOOR**

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Free-Standing 4C Horizontal Mailboxes include a U.S.P.S. approved 4C horizontal mailbox unit and a matching enclosure. For delivery of U.S. mail, contact your local postmaster for approval.

<sup>1</sup>These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.